

# ROYAL CUPRO NICKEL 90/10 (E CuNi)

AWS : A / SFA 5.6, E Cu Ni EN ISO 24373 A S Cu 7061


## Applications

It is used for welding of wrought or cast 70/30 , 80/20 and 90/10 Copper - Nickel Alloys. Also used for welding of clad side of Copper nickel clad steel, desalination plant, evaporators etc. in salt and sea water processing system .

## Characteristics on Usage

It is a copper nickel type welding electrodes deposits 90 % copper 10 % Nickel Weld metal, which is highly resistance to corrosion, erosion or cavitations in salt and brackish water. The preheating is not normally require, Maximum interpass temperature 150o C and no PWHT

## Welding Positions

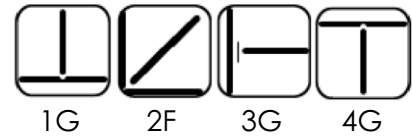

NONFERROUS

## Chemical Composition Of Weld Metal

Mn%	Si%	P%	Ni %	Cu%	Fe%	Ti %
1.00 – 2.50	0.50 max	0.020 Max	10.0	Bal.	0.40 – 0.75	0.50 Max

## Mechanical Properties Of Weld Metal

U.T.S. (N/mm <sup>2</sup> )	ELONGATION ( L = 4d ) %
350 Min	20 % Min

## Packing and Welding Current

SIZE ( mm )	KG PER PACKET	KG PER CARTON	Current (Amps)	In Amps
2.50 x 350	2	10	AC/DC (+)	50 - 80
3.15 x 350	2	10		80 - 110
4.00 x 350	2	10		110 - 140
5.00 x 350	2	10		140 - 180